


AGXwE RIC (P-RECIEVER)

Moderate to severe-to-profound hearing losses
AGXwE9/AGXwE7/AGXwE5/AGXwE3



Fitting range

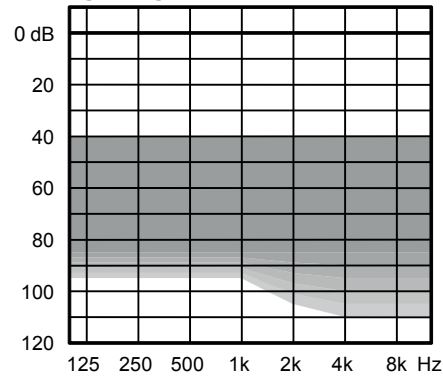

| Key Features | AGXwE9 | AGXwE7 | AGXwE5 | AGXwE3 |
|---|---------|--------|--------|--------|
| Performance | XXXXXX | XXXXX | XXXX | XX |
| Processing and fine-tuning channels | 15 | 12 | 10 | 6 |
| Adaptation manager | • | • | • | • |
| Fluid Sound Analyzer (sound classes) | 11 (IE) | 7 (IE) | 4 | 3 |
| Programs | 5 | 4 | 3 | 3 |
| Smartwind Manager | • | | | |
| High-frequency boost | • | | | |
| Speech Enhancer | RT/IE | IE | | |
| Digital Pinna | • | • | | |
| HD Locator | • | • | • | |
| TruSound Softener | • | • | • | |
| SoundSense Adapt | • | • | • | |
| Preference Control | • | • | • | • |
| Programmable Push Button* | • | • | • | • |
| Soft-level noise reduction | • | • | • | • |
| Noise reduction | • | • | • | • |
| ZEN IE | • | • | • | • |
| Audibility Extender | • | • | • | • |
| Connectivity | | | | |
| WidexLink compatible | • | • | • | • |
| DEX assistive listening devices (using WidexLink)** | • | • | • | • |
| Telecoil | • | • | • | • |
| Accessories | | | | |
| TONELINK App | • | • | • | • |
| COM-DEX App | • | • | • | • |

*Preference Control, program shift or a combination of the two


**Compatible with the following: CALL-DEX, TV-DEX, COM-DEX, UNI-TEX, RC-DEX, FM+ DEX, PHONE-DEX II

TECHNICAL DATA


| | | EAR SIMULATOR IEC 60118-0:1983, + A1:1994 | 2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014 |
|---|-----------------------------|--|--|
| OSPL90 | 1600 Hz Peak Average | 129 dB SPL 131 dB SPL 127 dB SPL | 120 dB SPL 121 dB SPL 118 dB SPL |
| Acoustic output (Input 60 dB SPL) | 1600 Hz Peak Average | 114 dB SPL 117 dB SPL 108 dB SPL | 105 dB SPL 107 dB SPL 101 dB SPL |
| Full-on gain (Input 50 dB SPL) | 1600 Hz Peak Average | 65 dB SPL 70 dB SPL 68 dB SPL | 56 dB SPL 65 dB SPL 59 dB SPL |
| Telecoil output (Input 31.6 mA/m) | | 114 dB SPL 117 dB SPL 108 dB SPL | 105 dB SPL 107 dB SPL 102 dB SPL |
| Acoustic Frequency range | | 100 Hz - 6700 Hz | 100 Hz - 6400 Hz |
| Harmonic distortion (Typical) | 500 Hz 800 Hz 1600 Hz | <2% <2% <2% | <2% <2% <2% |
| Equivalent input noise | | 20 dB SPL | 22 dB SPL |
| Battery drain (stand by) | | 1.02 mA | 1.02 mA |
| Battery drain* | | 1.06 mA | 1.09 mA |
| Battery life / hours (Type 312 Zn-Air, 170 mAh)* | | 160 h | 155 h |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) | | IRIL: -37/-13/-13 dB SPL | U-rating: M4/T4 |

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

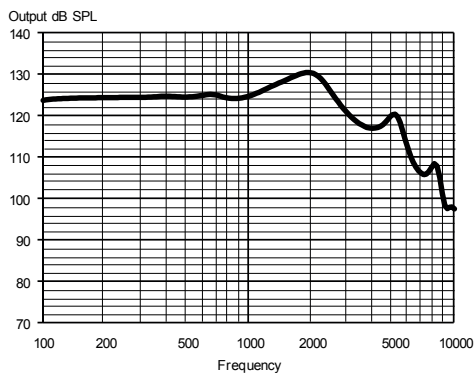

MAXIMUM OUTPUT - 2CC COUPLER

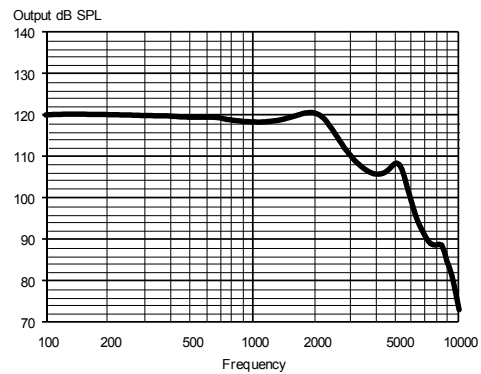

OUTPUT - EAR SIMULATOR

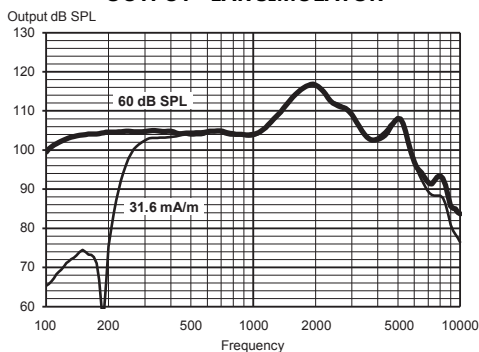

OUTPUT - 2CC COUPLER

