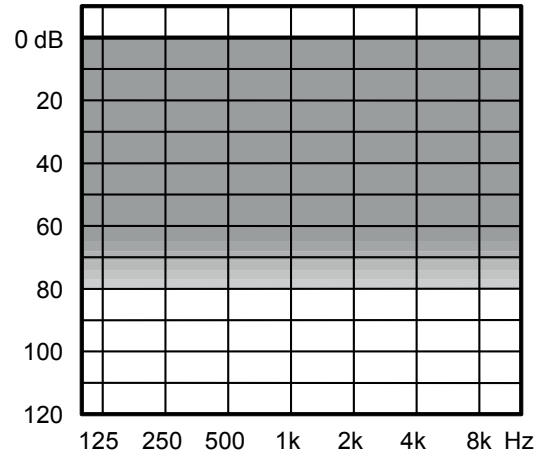


HUIER RIC S-RECEIVER

Minimal to severe hearing losses


Fitting range


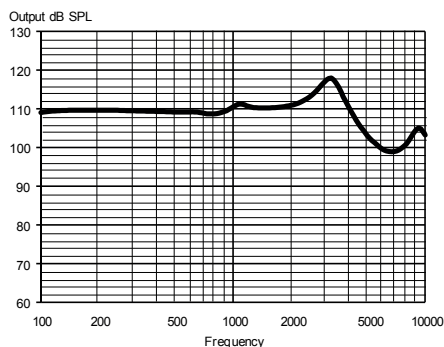
Key Features	S9B	S8B
Processing and fine-tuning channels	6	4
U platform	•	•
Preference control	•	•
Focus Mode	•	•
Noise Reduction	•	•
Sound Class Technology	3	1
HD Locator	6	Broadband
Programs	3	3
Connectivity and wireless compatibility		
App for iPhone and Android via COM-DEX	•	•
DEX assistive listening devices	CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX	

TECHNICAL DATA


		EAR SIMULATOR IEC 60118-0:1983, + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	110 dB SPL 118 dB SPL 110 dB SPL	101 dB SPL 107 dB SPL 102 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	94 dB SPL 102 dB SPL 89 dB SPL	85 dB SPL 91 dB SPL 85 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	59 dB SPL 63 dB SPL 58 dB SPL	49 dB SPL 52 dB SPL 50 dB SPL
Frequency range		100 Hz - 10000 Hz	100 Hz - 9300 Hz
Harmonic distortion (Typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		23 dB SPL	23 dB SPL
Battery drain (stand by)		0.95 mA	0.95 mA
Battery drain		0.97 mA	0.97 mA
Battery life / hours (Type 10 Zn-Air, 100 mAh)		95 (>75) h	95 (>75)
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -36/-25/20 dB SPL	U-rating: M4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR



MAXIMUM OUTPUT - 2CC COUPLER

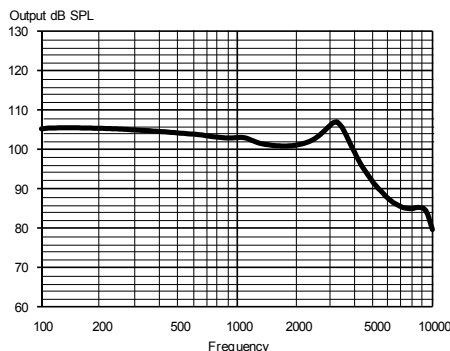

OUTPUT - EAR SIMULATOR

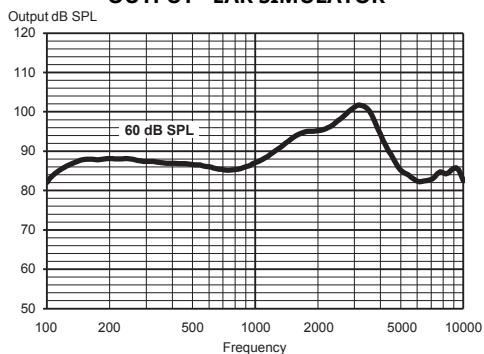

OUTPUT - 2CC COUPLER

