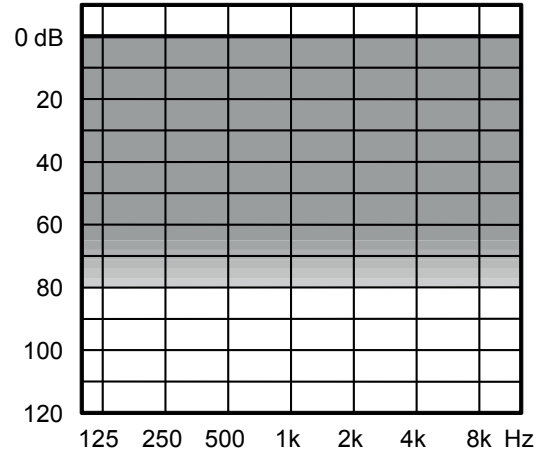


HUIER RIC S-RECEIVER

Minimal to severe hearing losses


Fitting range

Key Features

| | S10B |
|-------------------------------------|-------------|
| Processing and fine-tuning channels | 10 |
| U platform | • |
| Preference control | • |
| Focus Mode | • |
| Noise Reduction | • |
| Sound Class Technology | 5 (IE) |
| HD Locator | 10 |
| Programs | 4 |

Connectivity and wireless compatibility


| | |
|--|--|
| App for iPhone and Android via COM-DEX | • |
| DEX assistive listening devices | CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX |

TECHNICAL DATA


| | | EAR SIMULATOR IEC 60118-0:1983, + A1:1994 | 2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014 |
|---|-----------------------------|--|--|
| OSPL90 | 1600 Hz Peak Average | 110 dB SPL 118 dB SPL 110 dB SPL | 101 dB SPL 107 dB SPL 102 dB SPL |
| Acoustic output (Input 60 dB SPL) | 1600 Hz Peak Average | 95 dB SPL 103 dB SPL 92 dB SPL | 86 dB SPL 92 dB SPL 86 dB SPL |
| Full-on gain (Input 50 dB SPL) | 1600 Hz Peak Average | 58 dB SPL 63 dB SPL 57 dB SPL | 49 dB SPL 52 dB SPL 50 dB SPL |
| Frequency range | | 100 Hz - 10000 Hz | 100 Hz - 10000 Hz |
| Harmonic distortion (Typical) | 500 Hz 800 Hz 1600 Hz | <2% <2% <2% | <2% <2% <2% |
| Equivalent input noise | | 23 dB SPL | 23 dB SPL |
| Battery drain (stand by) | | 0.96 mA | 0.96 mA |
| Battery drain | | 0.98 mA | 1.00 mA |
| Battery life / hours (Type 10 Zn-Air, 100 mAh) | | 150 (>125) | 145 (>120) |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) | | IRIL: -33/-25/-24 dB SPL | U-rating: M4/T4 |

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

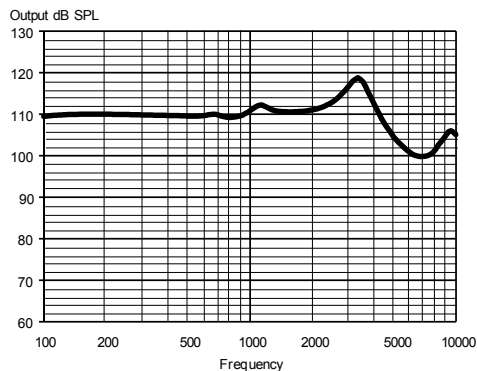

MAXIMUM OUTPUT - 2CC COUPLER

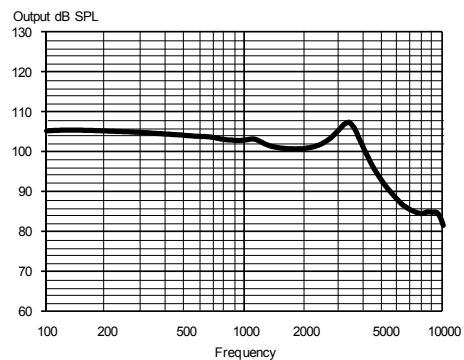

OUTPUT - EAR SIMULATOR

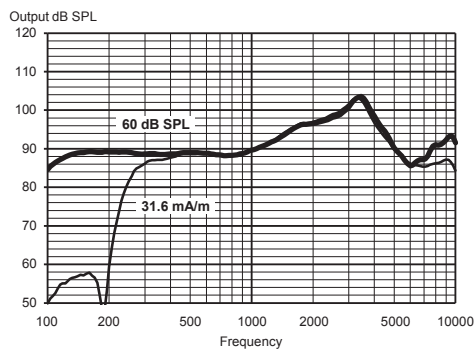

OUTPUT - 2CC COUPLER

